

Distribution - Unibundle cable B2ca (4 - 12 fibres)

Unibundle cable up to 12 fibres

This unibundle cable is designed for indoor/outdoor installation.

This cable has an outstanding fire behaviour.

Access to the bundle is easy with the internal ripcord.

This cable can be operated under a large temperature range.

Design

The UB-B2 LSZH* SP1879 cable has a central bundle with maximum

12 fibres inside.

The design is reinforced by a layer of watertight glass yarns and a LSZH* sheath.

Fibre type

The UB-B2 LSZH* SP1879 cable is available with singlemode and multimode fibres.

Technical performances


The unibundle cable performances are specified in the following tables.

Additional details

This cable is provided as a standard with a black sheath, other sheath colours are also available. Long exposure to UV with these other colours could generate colour fading.

Euroclass

B2ca S1a a1 d0

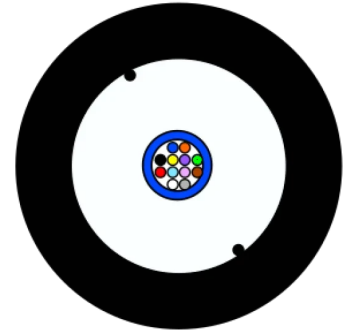

STANDARDS

EN 50399 B2

IEC 60332-1

IEC 60332-3

IEC 60754-1

IEC 60794

IEC 61034

NF C32-070/C2

* LSZH: Low Smoke Zero Halogen.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Distribution - Unibundle cable B2ca (4 - 12 fibres)

EIGENSCHAFTEN

Konstruktionsmerkmale

Farbe	Schwarz
Fasertyp	SM (G657.A2)
Außenmantel	LSZH
Halogenfrei	IEC 60754-1
Verwendetes Material für Längswasserdichtigkeit	Watertight glass yarns
Metallfrei	Yes
Leitungsaufbau	Unibundle
Additional strength member	Glass yarn

Abmessungsmerkmale

Nettogewicht ca.	45 kg/km
Anzahl der optischen Fasern	12
Anzahl der optischen Fasern, Bereich	...
Außendurchmesser, nom.	6.0 mm

Mechanische Eigenschaften

Mechanische Festigkeit gegen Schläge	10 impacts of 3 N.m
Maximalzulässige Dauerzuglast	0.7 kN
Querdruckwiderstand (IEC 794-1-E3)	200 N/cm
Maximale Zugspannung bei Installation	2200 N

Anwendungsmerkmale

Betriebstemperatur	-40...60 °C
flammwidrig	IEC 60332-3
Mindestbiegeradius bei statischem Einsatz	60 mm
Flammwidrig	IEC 60332-1
Rauchdichte	IEC 61034-2
UV Beständigkeit	Very good
Lagertemperatur, Bereich	-40...60 °C
Biegeradius während Verlegung	60 mm
Art der Installation	Indoor/Outdoor

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Umgebungstemperatur, Bereich

0...40 °C

Wasserdicht

Längs- und quer-

Verkauf & Lieferung Informationen

Standard Marking

Aginode - FIBRE OPTIC CABLE - UB-B2 LSZH B2ca s1 d0 a1 SP1879 - XXxYY - FB - TN - metric

XX = Fibre Count YY = Fibre Type FB = Frameries, Belgium (manufacturing place) TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	Name	Fasertyp	Farbe	Anzahl der optischen Fasern	
☎	10537745	-	UB LSZH 12xSM G657A2 SP1879 BK	SM (G657.A2)	Schwarz	12	
☎	10537713	-	UB LSZH 6xSM G657A2 SP1879 BK	SM (G657.A2)	Schwarz	6	

☎ = Make to order, 🏠 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.