

Railways - Multibundle K209 cables

MBC K209 LSZH 12X12SM G652D SP1758 BK

Aginode Ref: 10509235

Multi Micro-bundles cable with corrugated steel armour - 144 fibres

This multi micro-bundles cable is designed for indoor/outdoor installation in railways infrastructure.

The corrugated steel armour provides a high rodent protection. This cable has an outstanding fire behaviour.

Access to μbundles is made easy with the internal ripcord.

This cable can be operated under a large temperature range.

Design

The MBC LSZH SP1758 cable has a central strength member (FRP : Fibre Reinforced Plastic), with 12 bundles around integrating 12 fibres each. The design is reinforced by a first layer of watertight glass, a LSZH* inner sheath, a second layer of watertight glass yarns, a corrugated steel armour and a LSZH* outer sheath.

Fibre type


The MBC LSZH* SP1758 cable is available with singlemode.

Technical performances

The multibundle cable performances are specified in the following tables.

Additional details

This cable is provided as a standard with a black sheath, other sheath colours are also available. Long exposure to UV with these other colours could generate colour fading.

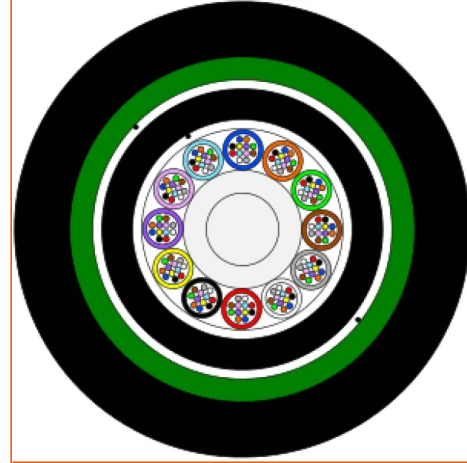

STANDARDS

EN 50399 B2
IEC 60331-2
IEC 60332-1
IEC 60332-3
IEC 60754-1
IEC 60794
IEC 61034
NF C32-070/C1

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Euroclass

B2^{ca} S1a a1 d0

* LSZH: Low Smoke Zero Halogen.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

MBC K209 LSZH 12x12SM G652D SP1758 BK

Characteristics

Construction characteristics

Colour	Black
Fiber optic type	SM (G.652D)
Armour type	Corrugated steel
Outer sheath	LSZH
Halogen free	IEC 60754-1
Material used for longitudinal water tightness	Swellable yarn
Metal free	No
Strength member	Central FRP
Construction type	Multibundle
Additional strength member	Glass yarn

Dimensional characteristics

Number of tubes	12
Approximate weight	265 kg/km
Number of optical fibres	144
Nominal outer diameter	14.8 mm

Mechanical characteristics

Mechanical resistance to impacts	10 impacts of 1 N.m
Maximum permanent tensile load	2.65 kN
Crush resistance (IEC 60794-1-E3)	300 N/cm
Maximum installation tension	4000 N

Transmission characteristics

Attenuation, max. 1310 nm (cabled)	0.36 dB/1000m
Attenuation, max. 1550 nm (cabled)	0.23 dB/1000m

Usage characteristics

Rodent protection	Corrugated steel tape
Operating temperature, range	-20...60 °C
Fire retardant	IEC 60332-3

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Minimum static operating bending radius	300 mm
Flame retardant	IEC 60332-1
Smoke density	IEC 61034-2
U.V resistance	Good
Storage temperature, range	-20...70 °C
Laying operation bending radius	450 mm
Installation type	Indoor/Outdoor
Installation temperature, range	-20...60 °C
Water proof	Longitudinal & radial

Declaration of Performance

MBC K209 LSZH 12x12SM G652D SP1758 BK pdf — 119.99 KB [Download](#) ↓

CprRegulation_CE_540320370_16476.pdf pdf — 106.76 KB [Download](#) ↓

Selling & delivery Information

Standard Marking

Aginode - FIBRE OPTIC CABLE - MBC LSZH SPxxxx - XXxYY - FB - TN - metric

XX = Fibre Count YY = Fibre Type FB = Frameries, Belgium (manufacturing place) TN = Traceability Number