

# LANmark-7A Cable

LANMARK-7A 1600 S/FTP AWG22 CAT 7A 1600MHZ LSZH DCA S2 D1 A1 ORANGE 1000M REEL

**Aginode Ref:** N100.381-OD

- Exceeds Category 7A in terms of ACR and Frequency Range
- Suitable for channels with capacity above 25GBps
- AWG22 Wire Size
- Positive Attenuation to Crosstalk Ratio up to 1600MHz
- Optimised for use with LANmark-7A GG45 connector
- Easy to install with Cat 7A connectivity through special foil construction

## Description

LANmark-7A 1600 is a 4 pair S/FTP cable with individual pair foils and an overall braid offering superior performance up to 1600MHz. It is fully compliant with the new Category 7A standard and offers even large headroom above the Cat 7A requirement. Due to this excellent electrical performance and positive ACR up to 1600MHz the cable is suited for transmission channels with a capacity of more than 25Gbps.


## Application

LANmark-7A is the highest performing standardised cabling solution in the enterprise market and will support all current data applications and all planned applications using cabling up to Class FA.

- All Ethernet applications including
- 10/100/1000Base-T
- 1000Base-TX
- 10GBase-T
- 25GBase-T
- CaTV up to 862MHz
- Cable sharing applications including CATV
- Any future Class FA application

## Installation

Ease of Installation is one of the main features of the LANmark-7A cable. Extra attention has been paid to ensure

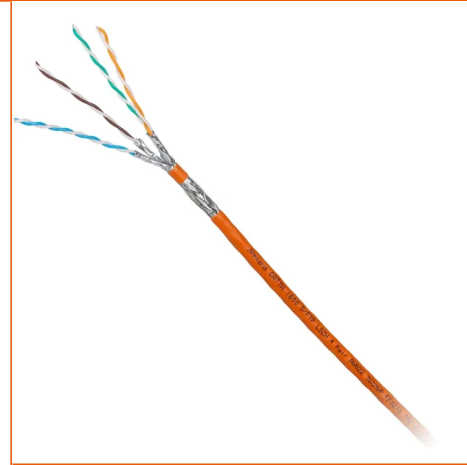

## STANDARDS

EN 50173  
EN 50288-4-1  
IEEE 802.3bt (PoE++)  
ISO/IEC 11801  
ISO/IEC 61156-5

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

that the screen coverage is maintained and foils do not open during installation. The cable has been specially designed to be used in conjunction with the LANmark-7A GG45 12C connector.

To support the correct set-up of hand held analysers for installation testing, the actual cable NVP value is given in the cable's print legend.

## Electrical Performance LANmark-7A 1600 Cable

Frequency (in MHz)	Attenuation (dB/10m)		NEXT (in dB)		ACR (in dB)		PS-NEXT (in dB)		ACR-F (in dB)		TCL (in dB)		Return Loss (in dB)	
	Max	Typical	Min	Typ	Min	Typ	Min	Typ	Min	Typ	Min	Typ	Min	Typ
1.00	2.1	1.9	75.0	105.0	72.9	103.1	80.0	87.5	88.0	83.0	40.0	43.0	20.0	30.0
4.00	3.7	3.5	75.0	105.0	71.3	101.5	80.0	87.5	88.0	83.0	34.0	37.0	23.0	33.0
10.00	5.5	5.4	75.0	105.0	69.2	99.6	80.0	87.5	88.0	83.0	30.0	33.0	25.0	34.0
16.00	7.3	6.8	75.0	105.0	67.7	98.2	80.0	87.5	88.0	83.0	28.0	31.0	25.0	34.0
20.00	8.2	7.6	75.0	105.0	66.8	97.4	80.0	87.5	88.0	83.0	27.0	30.0	25.0	34.0
31.25	10.3	9.5	75.0	105.0	64.7	95.5	80.0	87.5	88.0	83.0	25.1	28.1	23.7	32.7
62.50	14.6	13.4	75.0	105.0	60.4	91.6	80.0	87.5	88.0	83.0	22.1	25.1	21.6	30.6
100.00	18.5	17.1	75.0	102.4	56.5	85.4	80.0	87.5	85.3	80.3	20.0	23.0	20.1	29.1
155.00	23.2	21.3	72.5	97.6	49.3	76.3	80.0	87.5	80.5	75.5	18.1	21.1	18.8	27.8
300.00	32.7	29.9	68.2	90.5	35.6	60.6	80.0	87.5	73.4	68.4	15.2	18.2	17.3	26.3
600.00	47.1	42.7	63.7	82.9	16.6	40.3	75.8	83.3	65.8	60.8	12.2	15.2	17.3	26.3
800.00	54.9	49.6	61.9	79.8	6.9	30.2	74.0	81.5	62.7	57.7	11.0	14.0	16.1	23.8
1000.00	61.9	55.7	60.4	77.4	-1.5	21.7	72.5	80.0	60.3	55.3	10.0	13.0	15.1	21.9
1200.00	68.4	61.3	59.2	75.4	-3.1	14.1	71.3	78.8	58.3	53.3	9.2	12.2	14.3	20.3
1500.00	77.2	69.0	57.8	73.0	-19.5	4.0	69.9	77.4	55.9	50.9	8.2	11.2	13.3	18.3
1600.00	80.0	71.4	57.3	72.3	-22.7	0.9	69.4	76.9	55.2	50.2	8.0	11.0	13.0	17.8

Internal Description UK MRO 130903 Electrical Performance LM7A 1600

Title Electrical Performance LANmark-7A 1600 Cable

Description Typical Electrical Performance LANmark-7A 1600 Cable  
Maximum/Minimum requirements according to IEC61156-9 NP Draft 2013

Comment

Squared

Table width

Centered

Use small font for PDF

Online

Page break allowed

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.



# LANmark-7A 1600 S/FTP AWG22 Cat 7A 1600MHz LSZH Dca s2 d1 a1 Orange 1000m reel

## Characteristics

### Construction characteristics

Screen	Aluminium foil + tinned copper braiding
Outer sheath	LSZH
Sheath colour	Orange
Lead free	Yes
Type of cable	S/FTP
Drain wire	No

### Dimensional characteristics

Approximate weight	72 kg/km
Number of pairs	4
Conductor cross-section (AWG/KCMIL)	22
Diameter over insulation	1.58 mm
Nominal outer diameter	7.8 mm

### Electrical characteristics

Mutual capacitance	45 nF/km
Characteristic impedance	100 Ohm
Max. transfer impedance at 30 MHz (Ohm/km)	50 Ohm/km
Max. DC resistance of the conductor at 20°C	85 Ohm/km

### Mechanical characteristics

Maximum operating pulling force	100 N
---------------------------------	-------

### Transmission characteristics

Skew	25 ns/100m
Nominal Velocity of Propagation (NVP)	76 %
Coupling attenuation at 30 MHz	>85 dB
Propagation delay, max. 100 MHz	536 ns/100m

### Usage characteristics

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Range	LANmark-7A
Gases corrosivity	IEC 60754-1; IEC 60754-2
Length	1000 m
Operating temperature, range	-20...60 °C
Category	Cat. 7A
Flame retardant	IEC 60332-1
Smoke density	IEC 61034-2
Packaging	Reel
Ambient installation temperature, range	0...50 °C
Minimum Bend Radius - During Installation (under Tension)	69 mm
Minimum Bend Radius - Installed	34 mm

## Documentation

[Freetable LM7A 1600.xls xls — 35 KB](#) Download ↕

## Declaration of Performance

[LANmark-7A 1600 S/FTP AWG22 Cat 7A 1600MHz LSZH Dca s2 d1 a1 Orange 1000m reel pdf — 141.13 KB](#) Download ↕

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.