

Distribution - Unitube cables Cca

UG LSZH 24XSM G657A1 SP1884 BK

Aginode Ref: 10538185

Unitube cable with lateral strength - 24 fibres

This unitube cable is designed for indoor/outdoor installation.

This cable has an outstanding fire behaviour.

This cable can be operated under a large temperature range.

Design

This UG LSZH* SP1884 cable has a central tube with 24 fibres inside and lateral strength members (FRP: Fibre Reinforced Plastic). The design is reinforced by a layer of yarns and a LSZH* sheath.

Fibre type

The UG LSZH* SP1884 cable is available with singlemode and multimode fibres.


Technical performances

The unitube cable performances are specified in the following tables.

Additional details

This cable is provided as a standard with a black sheath, other sheath colours are also available. Long exposure to UV with these other colours could generate colour fading.

* LSZH: Low Smoke Zero Halogen.

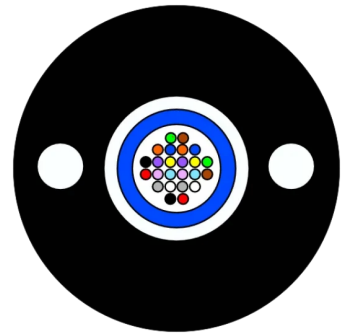

STANDARDS

EN 50399 B2

IEC 60332-1

IEC 60332-3

IEC 60754-1

IEC 60794

IEC 61034

NF C32-070/C2

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

UG LSZH 24xSM G657A1 SP1884 BK

Characteristics

Construction characteristics

Colour	Black
Fiber optic type	SM (G657.A1)
Halogen free	IEC 60754-1
Material used for longitudinal water tightness	Swellable yarn
Strength member	FRP
Additional strength member	Aramide

Dimensional characteristics

Approximate weight	45 kg/km
Number of optical fibres	24
Nominal outer diameter	6.0 mm

Mechanical characteristics

Mechanical resistance to impacts	3 impacts of 3 N.m
Crush resistance (IEC 60794-1-E3)	200 N/cm
Maximum installation tension	1100 N

Usage characteristics

Operating temperature, range	-30...60 °C
Flame retardant	IEC 60332-1
U.V resistance	Very good
Storage temperature, range	-40...70 °C
Installation type	Indoor/Outdoor
Installation temperature, range	0...40 °C
Water proof	Longitudinal & radial

Declaration of Performance

UG LSZH 24xSM G657A1 SP1884 BK pdf — 119.78 KB [Download](#) ↓

Selling & delivery Information

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Standard Marking

Aginode - FIBRE OPTIC CABLE - UG LSZH Cca s1a d1 a1 SP1884 - XXxYY - FB - TN - metric

XX = Fibre Count YY = Fibre Type FB = Frameries, Belgium (manufacturing place) TN = Traceability Number

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.