

Distribution - Tight cables Cca

TBU LSZH 24XSM G657A1 SP1857 BK

Aginode Ref: 10537970

Tight Buffer cable from 2 to 24- fibres

This tight buffer cable is designed for indoor/outdoor installation.

This cable has an outstanding fire behaviour.

Direct connectorization is made easy with 900µm buffered structure.

This cable can be operated under a large temperature range.

Design

The TBU LSZH* SP1857 cable has a central strength member (FRP: Fibre Reinforced Plastic), with 24 900µm buffered structure around. The design is reinforced by a layer of glass yarns and a LSZH* sheath.

Fibre type

The TBU LSZH* SP1857 cable is available with multimode and singlemode fibres.


Technical performances

The tight buffer cable performances are specified in the following tables.

Additional details

This cable is provided as a standard with a black sheath, other sheath colours are also available. Long exposure to UV with these other colours could generate colour fading.

* LSZH: Low Smoke Zero Halogen.

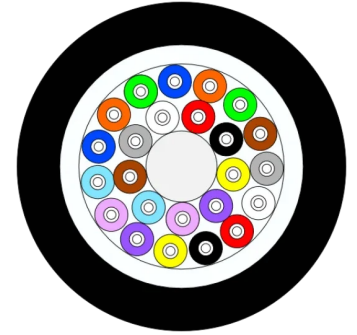

STANDARDS

EN 50399 B2
IEC 60332-1
IEC 60332-3
IEC 60754-1
IEC 60794
IEC 61034
NF C32-070/C1

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

TBU LSZH 24xSM G657A1 SP1857 BK

Characteristics

Construction characteristics

Colour	Black
Fiber optic type	SM (G657.A1)
Outer sheath	LSZH
Halogen free	IEC 60754-1
Metal free	Yes
Strength member	Central FRP
Construction type	Multi Tight
Additional strength member	Glass yarn

Dimensional characteristics

Approximate weight	78 kg/km
Number of optical fibres	24
Cable Diameter, range	... mm
Number of optical fibres, range	...
Nominal outer diameter	8.4 mm

Mechanical characteristics

Mechanical resistance to impacts	10 impacts of 3 N.m
Maximum permanent tensile load	0.6 kN
Crush resistance (IEC 60794-1-E3)	100 N/cm
Maximum installation tension	2000 N

Usage characteristics

Operating temperature, range	-20...70 °C
Fire retardant	IEC 60332-3
Minimum static operating bending radius	85 mm
Flame retardant	IEC 60332-1
Smoke density	IEC 61034-2
U.V resistance	Very good
Storage temperature, range	-40...70 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Laying operation bending radius	170 mm
Installation type	Indoor/Outdoor
Installation temperature, range	0...40 °C
Water proof	Radial

Declaration of Performance

TBU LSZH 24xSM G657A1 SP1857 BK pdf — 119.99 KB [Download](#) ↓

TBU LSZH 24xSM G657A1 SP1857 BK pdf — 120.34 KB [Download](#) ↓

CprRegulation_CE_540381490_17055.pdf pdf — 107.65 KB [Download](#) ↓

CprRegulation_CE_540381490_17054.pdf pdf — 106.97 KB [Download](#) ↓

Selling & delivery Information

Standard Marking

Aginode - FIBRE OPTIC CABLE - TBU LSZH Cca s1a d1 a1 SP1857 - XXxYY - FB - TN - metric

XX = Fibre Count YY = Fibre Type FB = Frameries, Belgium (manufacturing place) TN = Traceability Number