


GG45 8C PCB jack

- Right angled Cat 7A PCB jack up to 1500 MHz
- to be used in active equipment or patch panels
- UL94-V0 plastic components
- RoHS compliant
- Wave solder compatible.

Please refer to the datasheet of N420.738 for more detailed information and performance tables.

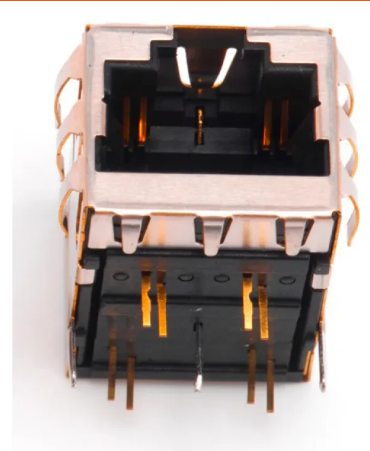

STANDARDS

ISO/IEC 11801

GG45 8C PCB jack

CHARACTERISTICS

Construction characteristics

Colour	Black
Screen	Yes
Connector type	Female

Dimensional characteristics

Depth	21.84 mm
Height	13.5 mm
Width	15.24 mm

Usage characteristics

Range	LANmark-7A
Category	Cat. 7A
Component function	Connector

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Product list

	Aginode ref.	Country ref.	Name	Range	Category
☎	N420.738	-	GG45 Right angle 8 contact jack for PCB mount	LANmark-7A	Cat. 7A

☎ = Make to order, 🏠 = In Stock

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.