

LANmark-OF Micro-Bundle Universal (24F-96F) Cca

LANMARK-OF MICRO-BUNDLE UNIVERSAL 24X SINGLEMODE 9/125 OS2 LSZH CCA YELLOW

Aginode Ref: N164.MBUN24-YC

- Micro-Bundle Universal optical fibre cable
- Indoor cable and outdoor installation in a duct
- Fully waterproof and rodent resistant
- Small, but mechanical strong cable
- Designed for splicing with pigtails
- 24 fibres in micro-bundles of 12 fibres

Description and Application


The new Micro-Bundle technology from Aginode allows to manufacture a flexible and small tube. This Micro-Bundle is the central part of the new “LANmark-OF Micro-Bundle Universal” cable design. Each Micro-Bundle contains 12 fibres with a fibre diameter of 250 um. Termination of these fibres is done with splicing with pigtails.

Several Micro-Bundles are arranged around a central strength element. The combination of the Micro-Bundle technology, the central strength element and the glass yarns result in a mechanical robust, but also in a small and flexible cable.

The small bending radius of the LANmark-OF Micro-Bundle Universal makes the cable easy to arrange in patch panels, in cable trays and in ducts.

The watertight glass yarns and the very limited amount of gel inside the tube make the LANmark-OF Micro-Bundle Universal design watertight, rodent resistant and suitable for installation outdoor in a duct by pulling.

The LANmark-OF Micro-Bundle Universal complies with the indoor fire requirements. Since there is no drip effect of the very limited amount of gel the cable is optimised for both horizontal and vertical installations.

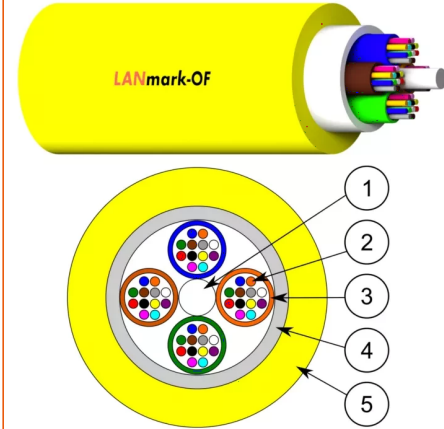

STANDARDS

ISO/IEC 11801

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

Construction

Legend accompanying the cross section drawing:

1. Central strength element
2. Optical fibre (250 µm)
3. Micro-Bundle with 12 fibres
4. Reinforced watertight glass yarns
5. Outer sheath in LSZH material with UV resistant additive

Characteristics

- Micro-Bundle design for easy installation
- Indoor cable for horizontal and vertical installations
- Flame retardant (IEC 60332-1)
- Fire retardant (IEC 60332-3)
- Outdoor cable for installation in a duct
- Waterproof structure, rodent resistant and UV-resistant
- All dielectric design
- Designed for termination by splicing
- 12 fibres per Micro-Bundle
- Available in all fibre grades
- Gas Toxicity (IEC 60754) and Smoke Density (IEC61034)
- Reaction fo fire: Cca according to EN50575:2014 +A1:2016
- Sheath Color: Aqua (OM3-OM4), Violet (OM4), Lime Green (OM5), Yellow (OS2)

LANmark-OF Micro-Bundle Universal 24x Singlemode 9/125 OS2 LSZH Cca Yellow

Characteristics

结构特性

光纤类型	SM (G657.A1)
外护套	低烟无卤
无卤	IEC 60754-1
不含金属	Yes
结构类型	多束管

尺寸特性

近似重量	35 kg/km
光纤数	24
标称外径	5.9 mm

机械特性

机械耐冲击性能	10次冲击/ N.M
最大长期拉力负载	0.2 kN
耐挤压 (IEC 794-1-E3)	100 N/cm
最大安装拉力	800 N

使用特性

操作温度, 范围	-20...60 °C
阻燃	IEC 60332-3
最小弯曲半径 - 静态	90 mm
阻燃 - 火焰	IEC 60332-1
烟密度	IEC 61034-2
抗UV	非常好
存储温度范围	-40...60 °C
敷设操作弯曲半径	120 mm
安装类型	室内/户外
Installation temperature, range	0...40 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.

业绩声明

LANmark-OF Micro-Bundle Universal 24x Singlemode 9/125 OS2 LSZH Cca Yellow pdf — 123.24 KB [下载](#) ↓

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Aginode is indicative only and shall not be binding on Aginode or be treated as constituting a representation on the part of Aginode.